

Outdoor Lighting



YUSING

www.yusinglighting.com

Auxiliary street lamp



IP65

120lm/w


30-200W






Product Details

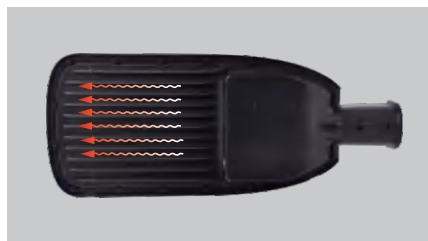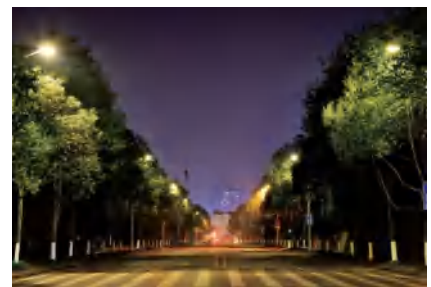

100W Lens



100W glass



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL160	100-240V	30	3600	≥70	>0.9	20000	Alu.	335*120*48	6/0.023/6.2
RL160	100-240V	50	6000	≥70	>0.9	20000	Alu.	385*165*50	4/0.025/6.8
RL160	100-240V	100	12000	≥70	>0.9	20000	Alu.	500*210*65	2/0.026/5.2
RL160	100-240V	150	18000	≥70	>0.9	20000	Alu.	600*245*70	1/0.015/4
RL160	100-240V	200	240000	≥70	>0.9	20000	Alu.	587*242*80	2/0.036/6.5

Auxiliary street lamp


IP65

100lm/w


30-150W






Product Details

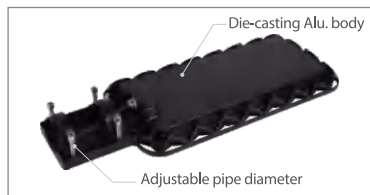

30W Glass



30W Lens



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ² / KG]
RL182-30W-Glass	220-240	30	3000	≥70	>0.9	20000	Alu.+glass	293*126*53	10/0.04/7.1
RL182-50W-Glass	220-240	50	5000	≥70	>0.9	20000	Alu.+glass	347*136*53	6/0.04/7
RL182-100W-Glass	220-240	100	10000	≥70	>0.9	20000	Alu.+glass	455*170*53	6/0.04/12.9
RL182-150W-Glass	220-240	150	15000	≥70	>0.9	20000	Alu.+glass	550*200*53	4/0.04/14
RL182-30W-Lens	220-240	30	3000	≥70	>0.9	20000	Alu.+PC	293*126*53	10/0.04/7.1
RL182-50W-Lens	220-240	50	5000	≥70	>0.9	20000	Alu.+PC	347*136*53	6/0.04/7
RL182-100W-Lens	220-240	100	10000	≥70	>0.9	20000	Alu.+PC	455*170*53	6/0.04/12.9
RL182-150W-Lens	220-240	150	15000	≥70	>0.9	20000	Alu.+PC	550*200*53	4/0.04/14

Auxiliary street lamp

IP65

100lm/w

30-150W



Product Details






30-150W



SMD3030



150W



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
RL179	100-240	30	3000	≥80	>0.9	30000	Alu.+PC	130*53*340	20/0.064/13.6
RL179	100-240	50	5000	≥80	>0.9	30000	Alu.+PC	155*55*390	10/0.044/9.6
RL179	100-240	100	10000	≥80	>0.9	30000	Alu.+PC	160*65*450	10/0.048/14
RL179	100-240	150	15000	≥80	>0.9	30000	Alu.+PC	170*65*570	5/0.041/10

SOSEN
LED DRLIER

LUMILEDS

IK08

ANTI-IMPACT

IP65

170lm/w


UGR < 19



Product Details



 **SMD3030**
 **-40°+50°**
 **60/90/120°**



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ³ / KG]
HL150	100-277	100	17000	≥70	>0.9	50000	Alu.	Ø258*115	4/0.030/18
HL150	100-277	150	25500	≥70	>0.9	50000	Alu.	Ø298*115	4/0.040/20.7
HL150	100-277	200	34000	≥70	>0.9	50000	Alu.	Ø298*115	4/ 0.040/20.7

LED Highbay Lamps

IP65

100lm/w





Product Details



Luminous Angle 110°



100W

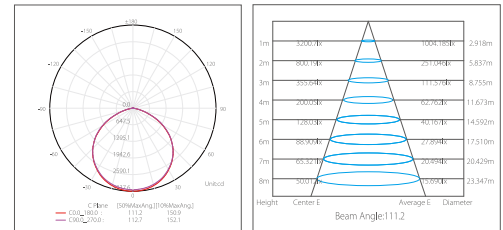

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ³ / KG]
HL128-W	220-240	100	10000	≥70	>0.9	30000	Alu.	Ø269.5*57.5	2/0.008/3.2
HL128-W	220-240	150	15000	≥70	>0.9	30000	Alu.	Ø317*50	2/0.009/4.2
HL128-W	220-240	200	20000	≥70	>0.9	30000	Alu.	Ø365*53.5	1/0.007/5.7

LED Highbay Lamps

SOSEN
LED DRLIER


LUMILEDS

IP65




150lm/W



Optional lens/Glass

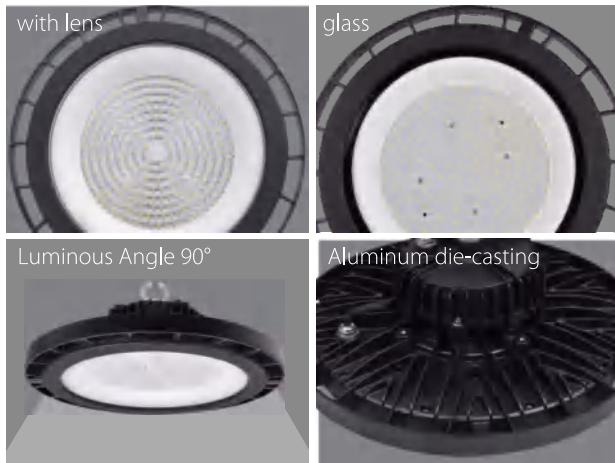

150W

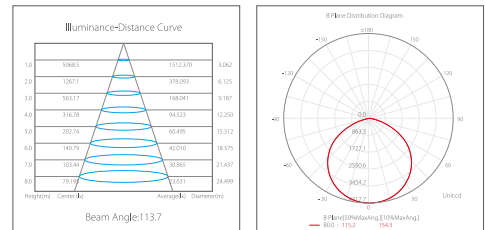

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ³ / KG]
HL117-TG2	100-277	100	15000	≥70	>0.9	30000	Alu.	Ø270*107	1/0.04/4.5
HL117-TG2	100-277	150	22500	≥70	>0.9	30000	Alu.	Ø310*108	1/0.04/4.5
HL117-TG2	100-277	200	30000	≥70	>0.9	30000	Alu.	Ø365*123	1/0.04/4.5
HL117-G2	100-277	100	15000	≥70	>0.9	30000	Alu.	Ø270*107	1/0.04/4.5
HL117-G2	100-277	150	22500	≥70	>0.9	30000	Alu.	Ø310*108	1/0.04/4.5
HL117-G2	100-277	200	30000	≥70	>0.9	30000	Alu.	Ø365*123	1/0.04/4.5

LED Highbay Lamps

IP65





100lm/W



Product Details



150W



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [DxHmm]	Packing [Pcs / M ³ / KG]
HL117	220-240	60	6000	≥70	>0.9	30000	Alu.	Ø230*48.5	1/0.03/1.75
HL117	220-240	80	8000	≥70	>0.9	30000	Alu.	Ø230*48.5	1/0.03/1.75
HL117	220-240	100	10000	≥70	>0.9	30000	Alu.	Ø270*57.5	1/0.026/1.05
HL117	220-240	150	15000	≥70	>0.9	30000	Alu.	Ø317*50	1/0.033/2.53
HL117	220-240	200	20000	≥70	>0.9	30000	Alu.	Ø365*53.5	1/0.024/4.5

Stadium & Tunnel Lights



LUMILEDS

IP65

130lm/w



Product Details







Angle adjustable 90°



Lens with 60°/90°

500W



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG653	100-277	500	65000	≥80	>0.9	50 000	Alu.+PC	690*530*125	1/0.048/24
LG653	100-277	1000	130000	≥80	>0.9	50 000	Alu.+PC	980*690*130	1/0.086/43

Stadium & Tunnel Lights



LUMILEDS

IP65




130lm/w



Product Details:



500W

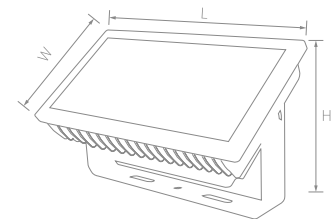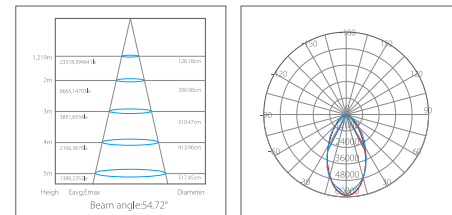

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG661-250W-C	100-277	250	32500	≥ 70	> 0.9	50000	Alu.	401*215*128	1/0.026/8
LG661-500W-C	100-277	500	65000	≥ 70	> 0.9	50000	Alu.	462*405*283	1/0.060/18
LG661-750W-C	100-277	750	97500	≥ 70	> 0.9	50000	Alu.	698*405*283	1/0.076/27
LG661-1000W-C	100-277	1000	130000	≥ 70	> 0.9	50000	Alu.	954*405*285	1/0.137/31.9

LED Floodlights NEW




90lm/w
IP65




Optional Cover





Optional accessories

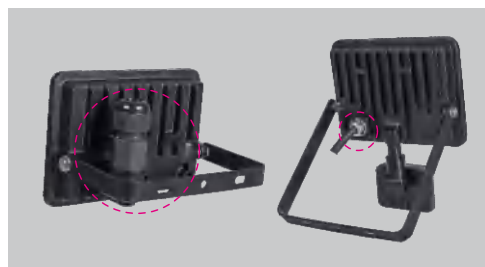

Product Details:

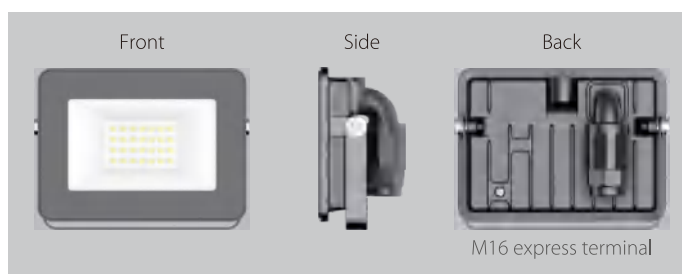

20W-50W are available with infrared induction

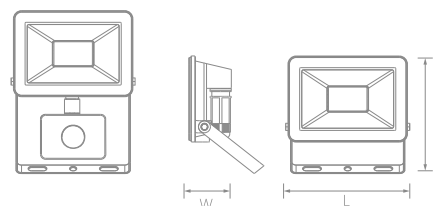

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	DF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG157C	220-240	10	900	≥80	>0.5	30000	Alu.+Glass	108*63*80	30/0.025/9
LG157C	220-240	20	1800	≥80	>0.7	30000	Alu.+Glass	128*63*102	30/0.03/12
LG157C	220-240	30	2700	≥80	>0.9	30000	Alu.+Glass	153*63*118	20/0.032/12
LG157C	220-240	50	4500	≥80	>0.9	30000	Alu.+Glass	203*63*154	16/0.035/15
LG157C	220-240	100	9000	≥80	>0.9	30000	Alu.+Glass	274*195*37	5/0.034/15
LG157C	220-240	150	13500	≥80	>0.9	30000	Alu.+Glass	337*246*42	4/0.015/14
LG157C	220-240	200	18000	≥80	>0.9	30000	Alu.+Glass	382*275*45	4/0.20/15

LED Floodlights NEW









Color Temp.
adjustable

100lm/w

IP65 & IK08



Product Details:

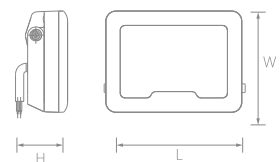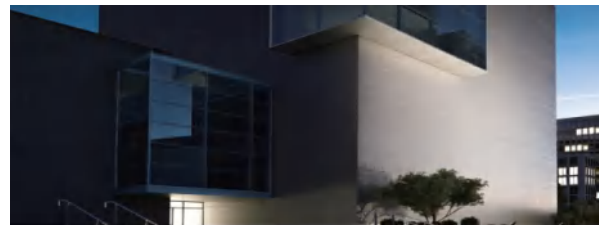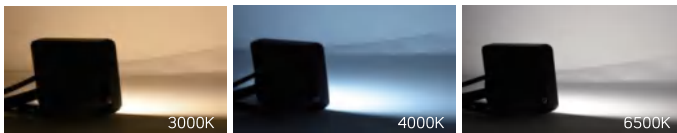

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG155	220-240	20	2000	≥80	>0.9	30000	Alu.+Glass	141*105*44	30/0.025/9
LG155	220-240	30	3000	≥80	>0.9	30000	Alu.+Glass	181*130*44	20/0.03/12
LG155	220-240	50	5000	≥80	>0.9	30000	Alu.+Glass	218*155*44	15/0.032/12
LG155	220-240	100	10000	≥80	>0.9	30000	Alu.+Glass	300*200*52	10/0.035/15

LED Floodlights

10-500w

90lm/w

IP65



Products



Product Details:





High grade construction stainless steel Exquisite workmanship and high quality 200W

Optional Cover 10~50W



Ultra thin Design

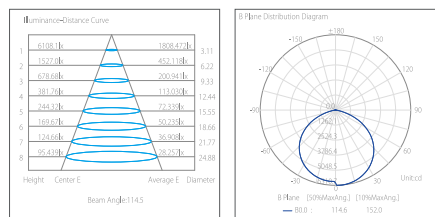

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG189	220-240	10	900	≥80	>0.5	30000	Alu.+Glass	103*77*23	60/0.025/12
LG189	220-240	20	1800	≥80	>0.5	30000	Alu.+Glass	136*108*24	40/0.027/14
LG189	220-240	30	2700	≥80	>0.9	30000	Alu.+Glass	176*136*25.5	20/0.022/10
LG189	220-240	50	4500	≥80	>0.9	30000	Alu.+Glass	210*163*28	10/0.017/9
LG189	220-240	100	9000	≥80	>0.9	30000	Alu.+Glass	255*198*36	10/0.028/11
LG189	220-240	150	13500	≥80	>0.9	30000	Alu.+Glass	315*233*38	5/0.034/15
LG189	220-240	200	18000	≥80	>0.9	30000	Alu.+Glass	410*298*40	4/0.015/14
LG189	220-240	300	27000	≥80	>0.9	30000	Alu.+Glass	521*378*53	10/0.11/8
LG189	220-240	400	36000	≥80	>0.9	30000	Alu.+Glass	696*419*56	12/0.16/10
LG189	220-240	500	45000	≥80	>0.9	30000	Alu.+Glass	696*419*56	12/0.16/10

LED Floodlights

ISPOT Ultra Thin Design

with Respirator



90lm/w

IP65



NO Frame



Product Details

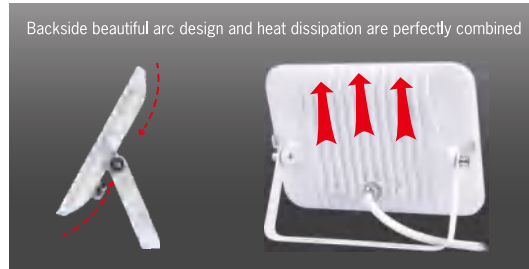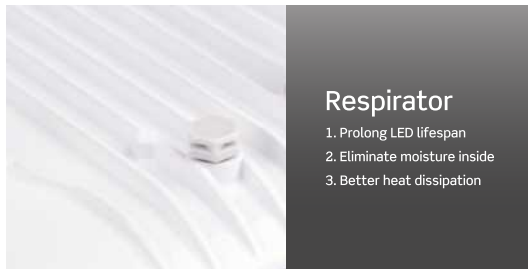

Accessories



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG168	100-240	10	900	≥70	>0.5	30000	Alu.	120*31*88	40/0.029/13.2
LG168	100-240	20	1800	≥70	>0.9	30000	Alu.	162*31*118	30/0.039/17.2
LG168	100-240	30	2700	≥70	>0.9	30000	Alu.	196*31*142	20/0.037/15.8
LG168	100-240	50	4500	≥70	>0.9	30000	Alu.	235*33*164	15/0.04/17.6
LG168	100-240	70	6300	≥70	>0.9	30000	Alu.	275*41*200	4/0.035/9.5
LG168	100-240	100	9000	≥70	>0.9	30000	Alu.	300*48*220	4/0.045/12

LED Floodlights

10-300w

90lm/w

IP65



Optional

Product details

SMD

With lens

High grade construction stainless steel

IP65





Counter flow design for cooling and protection, avoid leaves insects and other accumulations


✓ inclined bracket, convenient for installation



10W



3000 K 4000 K 6500 K




SMD2835



-40°+40°



110°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG158	220-240V	10	900	≥70	>0.5	30000	Alu.	110*26*95	60/0.035/14.8
LG158	220-240V	20	1800	≥70	>0.5	30000	Alu.	132*28*115	40/0.035/13.4
LG158	220-240V	30	2700	≥70	>0.9	30000	Alu.	185*30*160	40/0.053/24.8
LG158	220-240V	50	4500	≥70	>0.9	30000	Alu.	216*32*185	20/0.041/18.2
LG158	220-240V	70	6300	≥70	>0.9	30000	Alu.	275*41*205	20/0.048/21.3
LG158	220-240V	100	9000	≥70	>0.9	30000	Alu.	328*41*268	4/0.021/9.31
LG158	220-240V	150	13500	≥70	>0.9	30000	Alu.	380*45*305	4/0.031/12.9
LG158	220-240V	300	33000	≥70	>0.9	30000	Alu.	539*49*376	1/0.025/8.1

ISPOT LED flood lights



90lm/w
IP65






Product Details



✓ inclined bracket, convenient for installation



50W

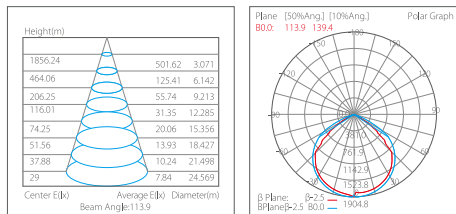

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG158S	220-240V	10	900	≥70	>0.5	30000	Alu.	131*40*188	20/0.025/15
LG158S	220-240V	20	1800	≥70	>0.5	30000	Alu.	184*49*225	20/0.040/20
LG158S	220-240V	30	2700	≥70	>0.9	30000	Alu.	215*60*260	10/0.035/15
LG158S	220-240V	50	4500	≥70	>0.9	30000	Alu.	230*60*295	10/0.045/22

LED Floodlights

IP65



Products



Product details

High grade construction stainless steel

SMD






Counter flow design for cooling and protection late, avoid leaves, insects and other accumulations.

✓ inclined bracket, convenient for installation



10W




SMD2835



-40°+40°



110°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG162	220-240V	10	850	≥70	>0.9	20000	Alu.+glass	90*63*25	80/0.031/10.6
LG162	220-240V	20	1700	≥70	>0.9	20000	Alu.+glass	108*82*28	60/0.030/11.8
LG162	220-240V	30	2550	≥70	>0.9	20000	Alu.+glass	143*102*30	40/0.032/13
LG162	220-240V	50	4250	≥70	>0.9	20000	Alu.+glass	183*132*30	20/0.027/12





LED Floodlights



10-300W
IP65



Product Details:

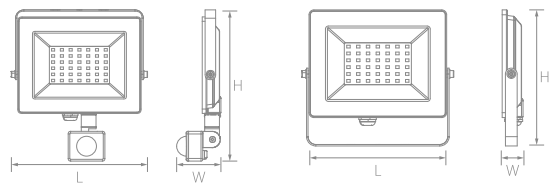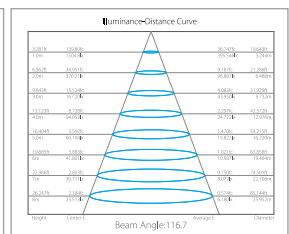

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG175S	220-240	20	1700	≥80	>0.5	20000	Alu.	117.6*90*21	30/0.04/10
LG175S	220-240	30	2550	≥80	>0.9	20000	Alu.	140.6*110*21	30/0.05/13.5
LG175S	220-240	50	4250	≥80	>0.9	20000	Alu.	183*143*22	20/0.06/15
LG175	220-240	10	850	≥80	>0.5	20000	Alu.	81.2*63*21	50/0.030/11
LG175	220-240	20	1700	≥80	>0.5	20000	Alu.	117.6*90*21	40/0.035/12
LG175	220-240	30	2550	≥80	>0.9	20000	Alu.	140.6*110*21	20/0.032/15
LG175	220-240	50	4250	≥80	>0.9	20000	Alu.	183*143*22	20/0.056/18
LG175	220-240	70	5950	≥80	>0.9	20000	Alu.	183*143*22	10/0.045/10
LG175	220-240	100	85000	≥80	>0.9	20000	Alu.	205*150*22	10/0.054/13
LG175	220-240	150	12750	≥80	>0.9	20000	Alu.	265*188*52	10/0.058/13
LG175	220-240	200	17000	≥80	>0.9	20000	Alu.	380*306*55	4/0.046/12
LG175	220-240	300	25500	≥80	>0.9	20000	Alu.	420*300*42	4/0.058/15





LED Floodlights



LUMILEDS
120lm/w
100-300w
IP65



Product details



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
LG198-C-LEN	100-240	100	12000	≥80	>0.9	50000	Alu.	341*257*59	2/0.019/8
LG198-C-LEN	100-240	150	18000	≥80	>0.9	50000	Alu.	374*280*63	2/0.027/9
LG198-C-LEN	100-240	200	24000	≥80	>0.9	50000	Alu.	417*299*68	1/0.024/5
LG198-C-LEN	100-240	300	36000	≥80	>0.9	50000	Alu.	482*345*73	1/0.04/9

LED Floodlights



100lm/w
100-300w

IP65




Product details



1. Die casting aluminum shell, interactive struction, greatly improve the heat dissipation;
2. Ultra thin design, thickness for 10W is 25mm only;
3. Unique space for sticker, more reasonable;
4. The bracket with Adjustable gear convenient for adjust angle(100-300W).




3000 K 4000 K 6500 K



SMD2835

-40°+45°

110°



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [LxWxHmm]	Packing [Pcs / M ³ / KG]
LG198	100-240	10	800	≥70	>0.5	30000	Alu.	98*25*75	40/0.018/12
LG198	100-240	20	1600	≥70	>0.5	30000	Alu.	118*25*95	40/0.018/14
LG198	100-240	30	2400	≥70	>0.9	30000	Alu.	140*28*112	30/0.02/9
LG198	100-240	50	4000	≥70	>0.9	30000	Alu.	170*34*136	25/0.019/10
LG198	100-240	70	5600	≥70	>0.9	30000	Alu.	206*34*166	10/0.023/13
LG198	100-240	100	10000	≥70	>0.9	30000	Alu.	341*257*59	2/0.019/8
LG198	100-240	150	15000	≥70	>0.9	30000	Alu.	374*280*63	2/0.027/9
LG198	100-240	200	20000	≥70	>0.9	30000	Alu.	417*299*68	1/0.024/5
LG198	100-240	300	30000	≥70	>0.9	30000	Alu.	482*345*73	1/0.04/9

LED Floodlights

RGBW



Remote control

RGBW+CCT

IP65



ERP2.0


Product Details:



The product takes the lighting effect actually



Instructions for remote control



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	LED ChipType	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs / M ³ / KG]
LG1166-RGBW	220-240	15	1250	2835+5054	/	>0.5	30000	Alu.+PC	120*90*25	40/0.026/14

Movable work lights



LG158-H



LG158-L




LG158-D



LG158-D2

  **ErP IP65**

with Tripod-stand , the height 1.5M, and 3*1.0mm² rubber cable 1.5M with plug



 **SMD2835**  **-40°+50°**  **110°**

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/M ³ /KG]
LG158-H	220-240V	20	1800	≥80	>0.5	30000	Alu.	220*65*210	10/0.047/10
LG158-L	220-240V	20	1800	≥80	>0.5	30000	Alu.	240*60*300	5/0.0296/5
LG158-D	220-240V	20	1800	≥80	>0.5	30000	Alu.	650*130*210	2/0.044/5
LG158-D2	220-240V	2*20	3600	≥80	>0.5	30000	Alu.	650*135*215	2/0.044/5.5

IK08
ANTI-IMPACT

IP65
CORROSION PROOF



BL111




BL112



Three color options



✓ convenient for installation

Terminals

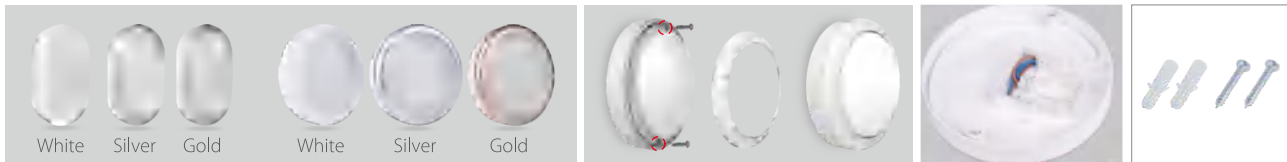

Three color options

✓ convenient for installation

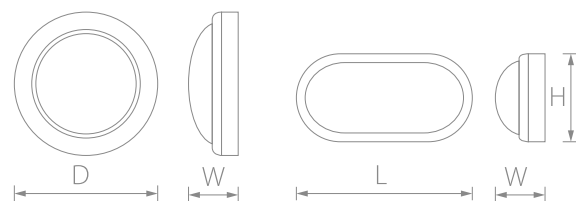

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL111	220-240	8	540	≥70	>0.5	30000	PC+ABS	Ø140*58	20/0.035/7.0
BL111	220-240	15	1050	≥70	>0.5	30000	PC+ABS	Ø180*66	20/0.061/14.0
BL112	220-240	8	540	≥70	>0.5	30000	PC+ABS	168*100*58	30/0.041/8.0
BL112	220-240	15	1050	≥70	>0.5	30000	PC+ABS	221*131*68	20/0.055/14.0

IK08
ANTI-IMPACT

IP65
CORROSION PROOF




BL211



BL212





3 Color Temperature Adjustment

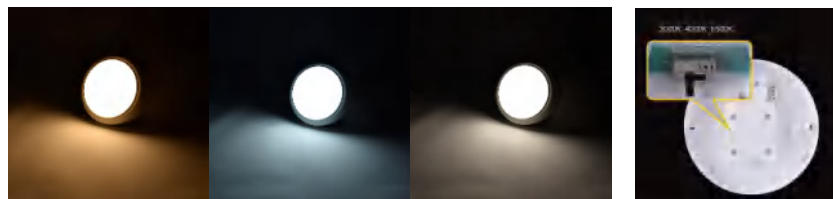

✓ convenient for installation

Terminals

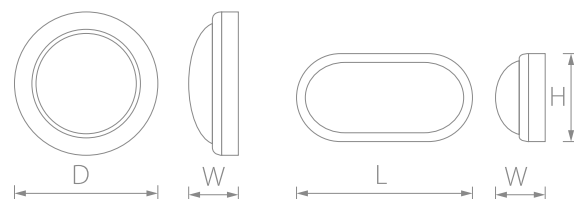

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL211	220-240	15	1275	≥80	>0.7	30000	PC+PC	∅180*66	20/0.061/14.0
BL212	220-240	15	1275	≥80	>0.7	30000	PC+PC	221*131*68	20/0.055/14.0

LED Bulkhead Lights

IK08

ANTI-IMPACT

IP44


CORROSION PROOF



BL111S



BL112S





PIR 6-8M DETECTION RANGE

- Adjustable hold time (60 secs)
- Built in daylight sensor, adjustable lux level
- Detection distance: 2-6M
- detection angle: 90°

Three color options



Terminals

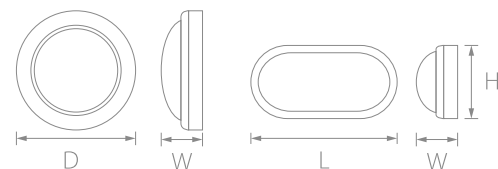

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ³ /KG]
BL111S	220-240	15	1050	≥70	>0.5	30000	PC+ABS	∅180*66	20/0.061/14.0
BL112S	220-240	15	1050	≥70	>0.5	30000	PC+ABS	221*131*68	20/0.055/14.0

LED Bulkhead Lights

IP65

CORROSION PROOF



BL151




BL152




Product Details



Easy installation

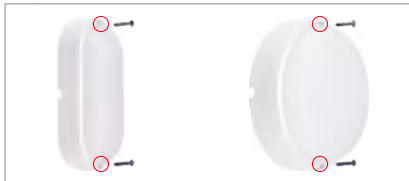

Terminals

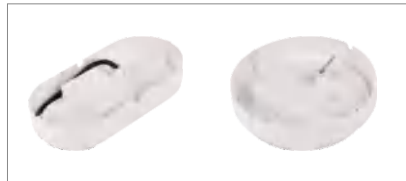

Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL151	100-240	8	640	≥80	>0.5	15000	PP+PP	Ø140*57	50/0.068/10.3
BL151	100-240	12	960	≥80	>0.5	15000	PP+PP	Ø155*62	50/0.081/11.5
BL151	100-240	18	1440	≥80	>0.5	15000	PP+PP	Ø172*62	50/0.104/13.8
BL152	100-240	8	640	≥80	>0.5	15000	PP+PP	155*80*55	50/0.043/7.7
BL152	100-240	12	960	≥80	>0.5	15000	PP+PP	174*87*55	50/0.055/8.8
BL152	100-240	18	1440	≥80	>0.5	15000	PP+PP	198*95*55	50/0.066/10.4

LED Bulkhead Lights

IP54

CORROSION PROOF




BL129



BL130


Product Details

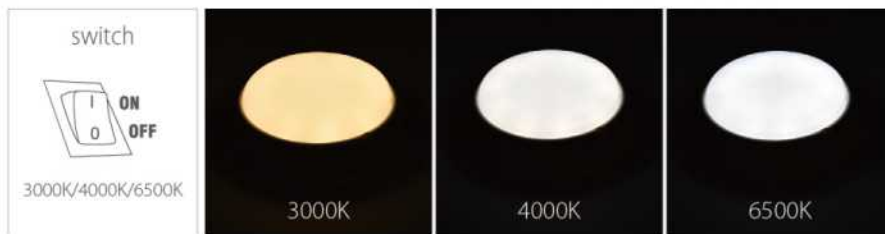

Easy installation



Terminals



Item No.	Voltage [V]	Wattage [W]	Lumen [lm]	Ra	PF	Life Time [H]	Material	Size [L*W*Hmm]	Packing [Pcs/m ² /KG]
BL129	220-240	8	560	≥70	>0.5	20000	PP+PP	Ø150*53.5	40/0.058/8.0
BL129	220-240	15	1050	≥70	>0.5	20000	PP+PP	Ø190*59.5	40/0.083/11.0
BL129	220-240	24	1680	≥70	>0.5	20000	PP+PP	Ø230*64.5	20/0.058/9.0
BL130	220-240	8	510	≥70	>0.5	20000	PP+PP	180*90*51	40/0.045/7.0
BL130	220-240	12	980	≥70	>0.5	20000	PP+PP	205*100*54.5	40/0.055/10.0

YUSING

www.yusinglighting.com

Ningbo Yusing Lighting Co, Ltd

 **ADD:**No.1199Mingguang Road,jiangshan Town,Yingzhou,Ningbo China

 **TEL:**0574-83028340

 **E-mail:**sales79@yusinglighting.com